STATE JOB NUMBER	FHWA REGION	STATE	PROJECT	
	5	OHIO	BRF 860(6)	

23/25

R/W ONLY	GUE-313-16.32
P.I.D. No. 7646	S.J.N. 052220

1/3

CENTERLINE SURVEY PLAT

GUE-313-16.32

GUERNSEY COUNTY RICHLAND TOWNSHIP SEC. 21, T-1N R-2W

NOT TO SCALE

50 0 50 100
SCALE IN FEET

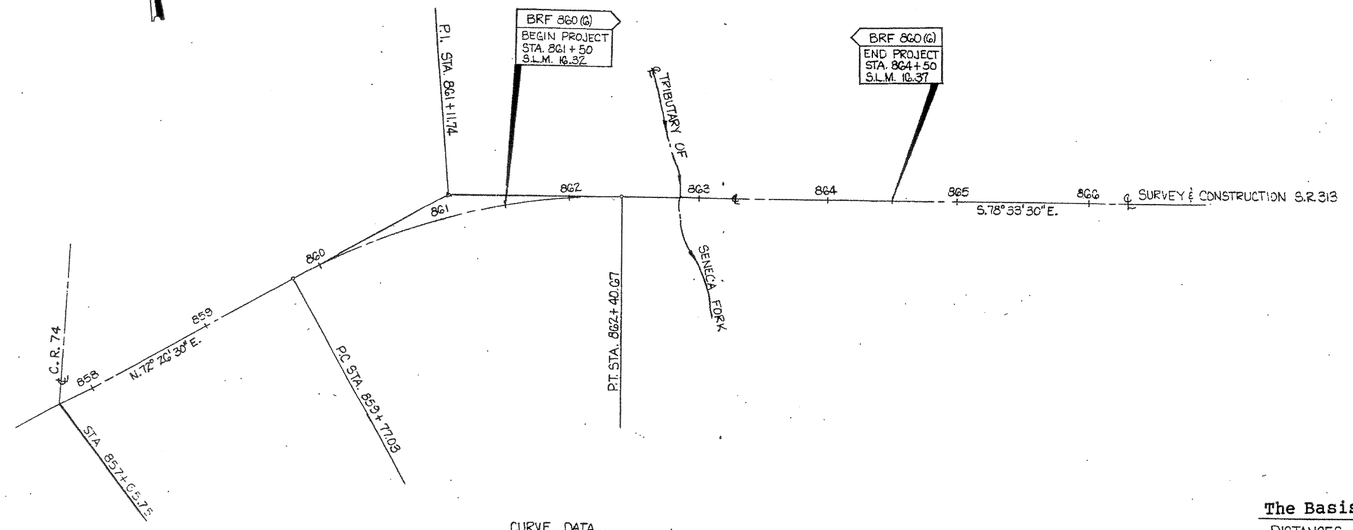

RIGHT OF WAY MONUEMENTS (○) ARE TO BE SET BEFORE CONSTRUCTION AT THE FOLLOWING STATIONS AT A TOLERANCE OF +/- 0.02 FT.		
STATION	LEFT	RIGHT
861+00	30.00'	30.00'
861+30		30.00'
861+50	45.00'	
862+85	80.00'	50.00'
863+00	45.00'	
863+30		65.00'
863+30		45.00'
863+74	45.00'	
863+74	30.00'	
864+00		30.00'
NOTE: STATIONS AND OFFSETS ARE BASED UPON CENTERLINE OF SURVEY & CONSTRUCTION.		



8" X 30" REBAR WITH A ASTIC IDENTICATION CAP AMPED "O.D.O.T. DIST. 5"

CURVE DATA
Δ = 29°00' RT.
✱ D_c = 11°00'
R = 520.87'
T = 134.71'
L = 263.64'
E = 17.13'
P.I. = 861+11.74
C = 260.83'
CB = N.86°56'30"E.

MONUMENT LEGEND

○ PROPOSED REFRENCE MONUMENT
● EXISTING IRON PINS

QUANTITIES CARRIED TO PLAN & PROFILE SHEET No. 7/24

RECIEVED 2/22 ,19 96
RECORDED ,19
BOOK CAB 3 PAGE 443
COUNTY RECORDER

The Basis of Bearings

DISTANCES SHOWN HEREON ARE EXPRESSED IN FEET AND DECIMAL PARTS THEREOF. MONUMENTS WERE FOUND OR SET AS INDICATED HEREON. BEARINGS SHOWN HEREON ARE TAKEN FROM ODOT MAP GUE-313-(14.72-15.86) DATED JAN. 19, 1921. ALL OF WHICH I CERTIFY TO BE CORRECT.

STATE OF OHIO · RALPH C TYLER 4236 · REGISTERED SURVEYOR

Ralph L Tyler 9-2-92
RALPH C. TYLER PE., PS. DATE
REGISTERED SURVEYOR NO. 4236
STATE OF OHIO

TYPE FUNDS : STATE

PLAN COMPLETED:		
REV.	DATE	DESCRIPTION